

## Bypass Swivel Lift Nubbin

The UMS Flowell Swivel Lift Nubbins allow handling of flush joint casing and tubing. The Swivel lift nubbins have a pin thread to mate with the corresponding flush joint box thread on the casing or tubing.


A 4.75 ton swivel allows single joints to be lifted with the tugger line or crane without the need for single joint elevators. A shoulder on the lift nubbin acts as a dummy coupling and allows the string to be handled with side door or centre latch elevators. If slip type elevators are used, the dummy coupling shoulder acts as a stop collar in the event that unplanned string slippage occurs.

### FEATURES & BENEFITS

- Lightweight
- Available in tubing and casing sizes from 2-1/8" upwards
- Various thread options
- Swivel hoist to allow make up of tubing / casing
- Elevator shoulder for picking up string weight or used as a stop shoulder when using slip type elevators

### SPECIFICATIONS

- 4.75 Ton SWL swivel hoist ring
- Elevator shoulder rating dependent on thread size, thread type, grade, and tubing/ casing weight

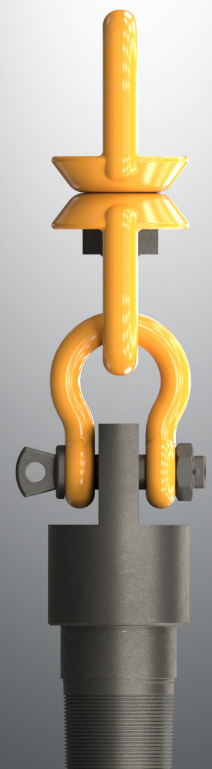

# Technical Specifications - Bypass Swivel Lift Nubbin

Part Number	SWL	Pin Thread
SLN-2125-01-F2J	4 Ton	2-1/8" 2.4# F2J
SLN-2375-01-F2J	4.5 Ton	2-3/8" 4.6# F2J
SLN-2875-01-F2J	4 Ton	2-7/8" 6.4# F2J
SLN-2875-01-F2JLB	4 Ton	2-7/8" 6.4# F2JLB
SLN-2875-02-F2J	4 Ton	2-7/8" 6.4# F2J
SLN-4250-01-F2J	15 Ton	4-1/4" 10# F2J
SLN-5500-01-F2J	4 Ton	5-1/2" 15.5# F2J

